



Cara Menjalankan Program

- Buat file request baru di Postman.
- Tentukan URL endpoint yang akan diuji.
- Tentukan metode HTTP yang akan digunakan.
- Tentukan parameter request yang akan dikirim.
- Jalankan request.
- Tinjau respons yang diterima.

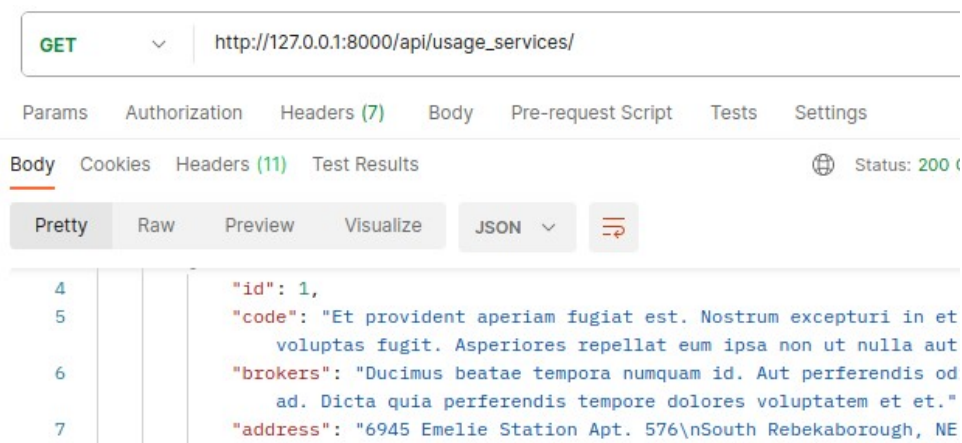

The screenshot shows a Postman interface for a GET request to the endpoint `http://127.0.0.1:8000/api/usage_services/`. The response is displayed in the 'Body' tab, showing a JSON object with the following fields:

```
4   "id": 1,  
5   "code": "Et provident aperiam fugiat est. Nostrum excepturi in et  
6   voluptas fugit. Asperiores repellat eum ipsa non ut nulla aut  
7   "brokers": "Ducimus beatae tempora numquam id. Aut perferendis od  
   ad. Dicta quia perferendis tempore dolores voluptatem et et."  
   "address": "6945 Emelie Station Apt. 576\nSouth Rebekaborough, NE
```

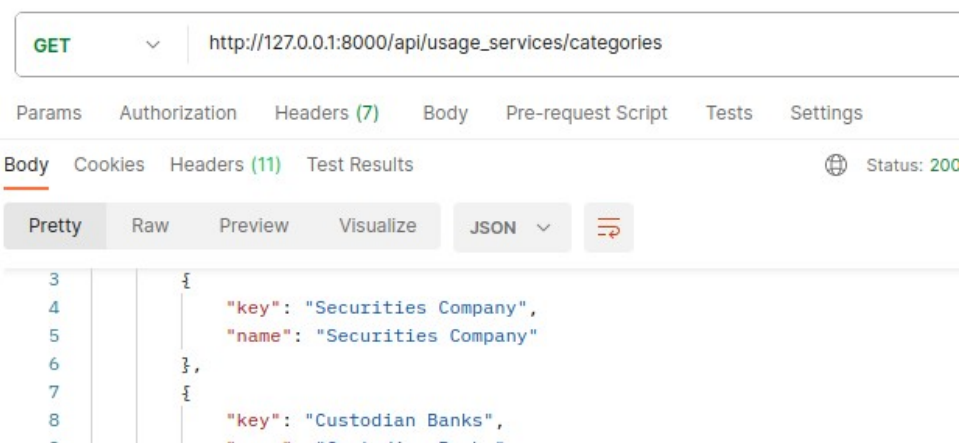

The screenshot shows a Postman interface for a GET request to the endpoint `http://127.0.0.1:8000/api/usage_services/categories`. The response is displayed in the 'Body' tab, showing a JSON array of objects:

```
3   {  
4     "key": "Securities Company",  
5     "name": "Securities Company"  
6   },  
7   {  
8     "key": "Custodian Banks",  
9     "name": "Custodian Banks"
```