


CARA MENJALANKAN PROGRAM

1. Server online :
dengan mengunjungi <http://kb.klikwa.id> pada browser.

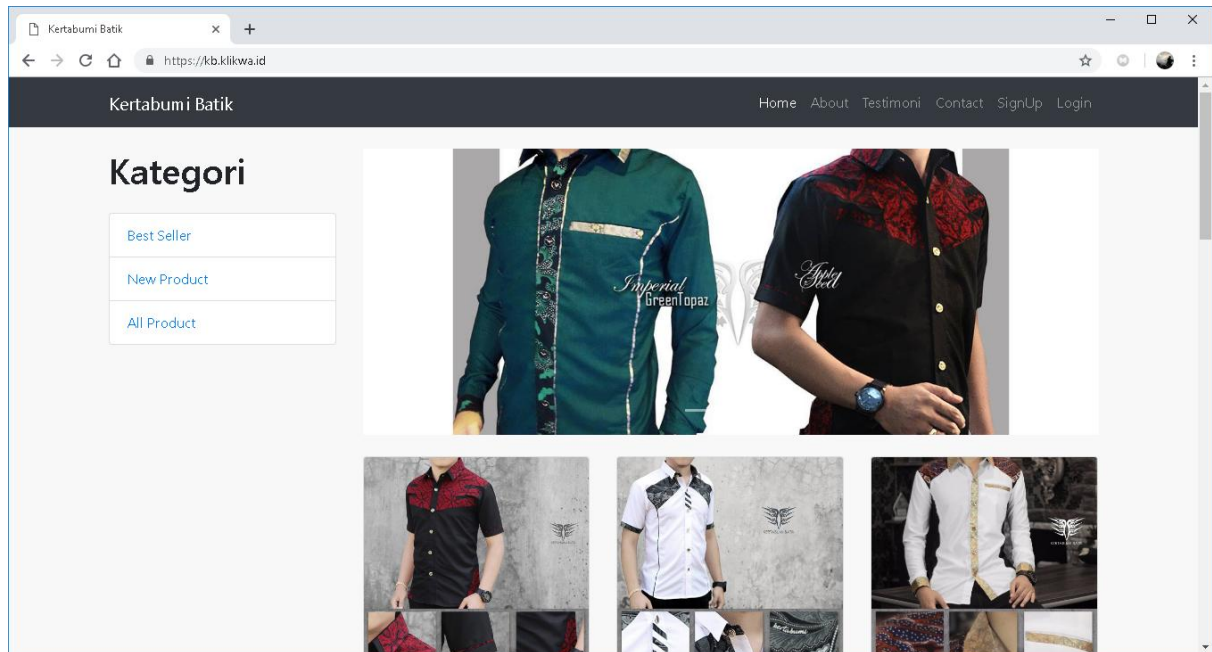

2. Server offline :

- a. Install dan Aktifkan Apache, Php dan Mysql di Amps Server



- b. Letakkan Struktire file program pada Server Amps. Letakkan di folder C:/Program Filer (x68)/Amps/www/kertabumi (nama project).

The screenshot shows a Windows File Explorer window with the address bar set to "This PC > WIN (C:) > Program Files (x86) > Amps > www > kertabumi". The file list is as follows:

Name	Date modified	Type	Size
app	12/01/2019 16:11	File folder	
bootstrap	18/04/2018 20:13	File folder	
config	10/11/2018 01:47	File folder	
database	18/04/2018 20:13	File folder	
public	18/01/2019 21:27	File folder	
resources	18/04/2018 20:13	File folder	
routes	18/04/2018 20:13	File folder	
storage	18/04/2018 20:13	File folder	
tests	18/04/2018 20:13	File folder	
vendor	10/11/2018 01:40	File folder	
.env	20/12/2018 22:56	ENV File	1 KB
.env.example	21/03/2018 20:17	EXAMPLE File	1 KB
.gitattributes	21/03/2018 20:17	Text Document	1 KB
.gitignore	21/03/2018 20:17	Text Document	1 KB
.htaccess	21/03/2018 20:17	HTACCESS File	1 KB
adminer.php	18/12/2017 22:12	PHP File	415 KB
artisan	21/03/2018 20:17	File	2 KB
composer.json	29/10/2018 09:25	JSON File	2 KB
composer.lock	29/10/2018 09:27	LOCK File	146 KB
db_kertabumi.sql	18/01/2019 16:12	SQL File	37 KB
index.php	10/11/2018 01:56	PHP File	2 KB
phpunit.xml	21/03/2018 20:17	XML Document	2 KB
server.php	21/03/2018 20:17	PHP File	1 KB
shell.php	15/12/2018 23:20	PHP File	16 KB

c. Import database ke phpmyadmin.

localhost/phpmyadmin/#PMAURL-5:db_import.php?db=db_kertabumi&table=&server=1&target=&token=bc0741db4c8aafdd210fd6a0634fbdcc

Server: localhost Database: db_kertabumi

Structure SQL Search Query Export **Import** Operations Privileges Routines Events Triggers

Importing into the database "db_kertabumi"

File to Import:

File may be compressed (gzip, bzip2, zip) or uncompressed. A compressed file's name must end in **[format].[compression]**. Example: **.sql.zip**

Browse your computer: **Choose File** **db_kertabumi.sql** (Max: 8,192KiB)

You may also drag and drop a file on any page.

Character set of the file: utf-8

Partial Import:

☒ Allow the interruption of an import in case the script detects it is close to the PHP timeout limit. (This might be a good way to import large files, however it can break transactio

Skip this number of queries (for SQL) or lines (for other formats), starting from the first one: 0

Format:

SQL

Format-Specific Options:

localhost/localhost/db_kertabumi

localhost/phpmyadmin/#PMAURL-4:db_structure.php?db=db_kertabumi&table=&server=1&target=&token=bc0741db4c8aafdd210fd6a0634fbdcc

phpMyAdmin

Recent Favorites

New dbajax db_kertabumi kertabumi percetakan

Table	Action	Rows	Type	Collation	Size	Overhead
adminstoks	Browse Structure Search Insert Empty Drop	2	InnoDB	utf8mb4_unicode_ci	16 KiB	-
customers	Browse Structure Search Insert Empty Drop	7	InnoDB	utf8mb4_unicode_ci	32 KiB	-
detailkemejas	Browse Structure Search Insert Empty Drop	9	InnoDB	utf8mb4_unicode_ci	16 KiB	-
detail_kains	Browse Structure Search Insert Empty Drop	7	InnoDB	utf8mb4_unicode_ci	16 KiB	-
detail_kemejas	Browse Structure Search Insert Empty Drop	11	InnoDB	utf8mb4_unicode_ci	16 KiB	-
kains	Browse Structure Search Insert Empty Drop	2	InnoDB	utf8mb4_unicode_ci	16 KiB	-
kemejas	Browse Structure Search Insert Empty Drop	38	InnoDB	utf8mb4_unicode_ci	16 KiB	-
keranjangs	Browse Structure Search Insert Empty Drop	4	InnoDB	utf8mb4_unicode_ci	48 KiB	-
migrations	Browse Structure Search Insert Empty Drop	35	InnoDB	utf8mb4_unicode_ci	16 KiB	-
password_resets	Browse Structure Search Insert Empty Drop	3	InnoDB	utf8mb4_unicode_ci	32 KiB	-
pesans	Browse Structure Search Insert Empty Drop	4	InnoDB	utf8mb4_unicode_ci	16 KiB	-
testimonis	Browse Structure Search Insert Empty Drop	9	InnoDB	utf8mb4_unicode_ci	16 KiB	-
transaksis	Browse Structure Search Insert Empty Drop	3	InnoDB	utf8mb4_unicode_ci	32 KiB	-
users	Browse Structure Search Insert Empty Drop	1	InnoDB	utf8mb4_unicode_ci	16 KiB	-
14 tables	Sum	125	InnoDB	latin1_swedish_ci	384 KiB	0 B

Check All With selected:

d. Atur koneksi database di file .env

FOLDERS

- kertabumi
 - allimg
 - app
 - bootstrap
 - config
 - database
 - public
 - resources
 - routes
 - storage
 - tests
 - vendor
- .env
- .env.example
- .gitattributes
- .gitignore
- .htaccess

```
.env
1 APP_NAME=Laravel
2 APP_ENV=local
3 APP_KEY=base64:iywuWgIIm83S/WVOb5w3juIGKYSe+D4o424rAt/FwU=
4 APP_DEBUG=true
5 APP_URL=http://localhost
6
7 LOG_CHANNEL=stack
8
9
10 DB_CONNECTION=mysql
11 DB_HOST=127.0.0.1
12 DB_PORT=3306
13 DB_DATABASE=db_kertabumi
14 DB_USERNAME=root
15 DB_PASSWORD=mysql
16
17 BROADCAST_DRIVER=log
18 CACHE_DRIVER=file
19 SESSION_DRIVER=file
20 SESSION_LIFETIME=120
21 QUEUE_DRIVER=sync
22
23 REDIS_HOST=127.0.0.1
24 REDIS_PASSWORD=null
25 REDIS_PORT=6379
```

e. Buka Browser dan akses <http://localhost/kertabumi>

